


GM40 Series Series Multi-Voltage 24-hour 7-Day

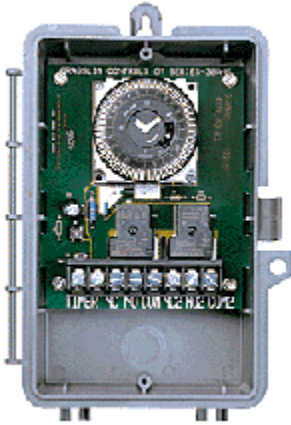

Features:

- Screw box lug terminals

Specifications:

N.O. Contacts:

- 40 Amp Resistive, 120-277 VAC
- 1 HP (16 FLA, 90 LRA), 120 VAC
- 2 HP (12 FLA, 52 LRA), 208-277 VAC
- 30 Amp Ballast, 120 VAC
- 20 Amp Ballast, 277 VAC
- 15 Amp Tungsten, 120 VAC
- 300 VA Pilot Duty, 120-240 VAC

N.C. Contacts:

- 30 Amp Resistive, 120-277 VAC
- 1 HP (12 FLA, 30 LRA), 120 VAC
- 2 HP (10 FLA, 30 LRA), 240 VAC
- 2 Amp Tungsten, 120 VAC
- 10 Amp Ballast, 277 VAC

Enclosures: NEMA 3R Indoor/Outdoor, see page 48, Model No. E300

Operating Temperature Range: -40°F to 131°F (-40°C to 55°C)

Operating Humidity: 0 to 95% non-condensing

Size: 8.795 in. H x 6.631 in. W x 2.935 in. D

Weight: 3 lbs.

Model	Description	Volts AC	Switch Configuration	Amp Rating	Min. ON/OFF Time	Battery Back up
<u>GM40</u>	24-Hour mechanical time switch	120, 208-240, 277	SPDT/DPDT	40/30	15	No

Model	Description	Volts AC	Switch Configuration	Amp Rating	Min. ON/OFF Time	Battery Back up
•						
<u>GM40-M</u>	24-Hour mechanism only	120, 208-240, 277	SPDT/DPDT	40/30	15 minutes	No
•						
<u>GM40Q</u>	24-Hour mechanical time switch	120, 208-240, 277	SPDT/DPDT	40/30	15 Minutes	Yes
•						
<u>GM40W*</u>	7-Day mechanical time switch	120, 208-240, 277	SPDT/DPDT	40/30	2 Hour	No
•						
<u>GM40QW*</u>	7-Day mechanical time switch	120, 208-240, 277	SPDT/DPDT	40/30	2 Hours	Yes
•						

* Has 7-Day/Weekly/Skip-A-Day Functionality.

